




## Sani-Chain Retrofit Collator

Replace the collator on your current CS-1800 loader with our new Sani-Chain Collator. Removable flights make this collator even more sanitary than our standard collator.

- Cut cleaning time in half
- Removable collator flights for an easier to clean high speed loader
- Production speed equal to our standard collator
- Flights are simple & easy to insert
- Guide rails able to be removed without tools
- No sandwiched areas between cam assemblies
- Top paddle assembly adjustments are less dependent on experienced operators
- Diameter range: 12mm to 32mm
- Up to 1,800 pieces per minute\*
- 98%+ fill rate

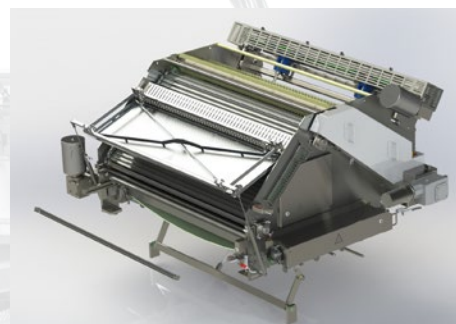

\*Final output speed is dependent on product specifications and the packaging machine.  
Guarding may be removed in some images for demonstration purposes.

# SANI-CHAIN RETROFIT COLLATOR

The Drake Sani-Chain Retrofit Collator is designed to easily replace the standard collator on our popular CS-1800 autoloader.

This Sani-Chain retrofit collator features removable flights, which allows for easy access to clean hard to reach places. Simply insert the flights for the diameter product you want to run. Each removable flight accomodates approximately a 5 mm diameter product range.

Stainless steel servo motor and gearbox mean less safety covers for personnel to remember to replace. Guide rails can be removed without tools. Front & rear rods no longer need adjustment for different product sizes. In

addition, top paddle assembly adjustments are less dependent on the experience of operators.

To install, just remove your old collator and install a new Drake Sani-Chain Collator.

The Sani-Chain retrofit collator features our state-of-the-art handling method that minimizes recirculation of product by using a first-in, first-out system.

The Sani-Chain retrofit collator can handle up to 1,800 pieces per minute of a 127mm (5 inches) long product and has a 98% fill rate. It can load frankfurters that are cooked or chilled and can handle skinless or skin-on products.



Drake Sani-Chain Collator Specifications			
Voltage	Noise Level	Water (optional)	Air
208-240 V or 380-480 V 50 or 60 Hz, 3PH Fuse: 30A	>80.0 dB (A)	8 GPM (30 LPM)	80 PSI (5.62 kgf/ cm <sup>2</sup> )